


# Heavy duty bumper pull hydraulic tilt – HDB



| Trailer size | Trailer code | Deck length | Deck width | Deck height | GVWR       | Payload capacity | Trailer weight |
|--------------|--------------|-------------|------------|-------------|------------|------------------|----------------|
| 7' X 20'     | GHTEH9       | 20'         | 82"        | 24"         | 14,000 LBS | 10,375 LBS       | 3,625 LBS      |

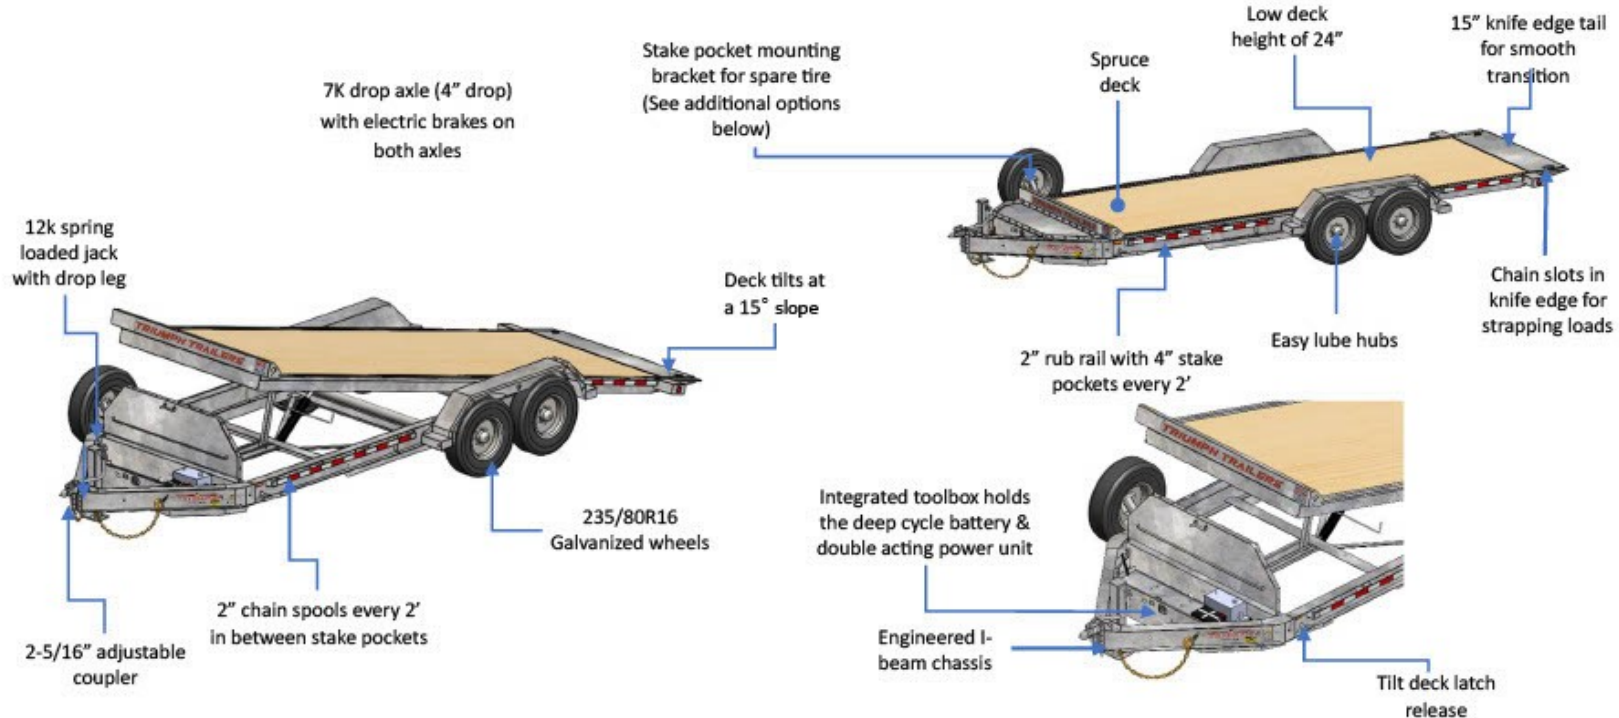

### Additional options:

- Spare tire and mount
- 3" eye adjustable pintle ring (25,000 LBS capacity)
- Hydraulic jack
- 14 ply tire upgrade
- 8k axle upgrade

### Additional information:

- Engineered I-beam frame with 3" C-channel crossmembers at 16" centers
- LED lighting (lifetime warranty)
- Hot dip galvanizing offers greater protection and prevents the formation of rust

### Hot Dip Galvanizing Process

First, the product is dipped in acidic solution and rinsed with cold water to remove the grease, dirt, rust and scale. It is then dipped in a flux solution to remove the last traces of oxide and to wet the steel. When the clean iron is then dipped into a molten zinc solution (typically at 450°C), it forms zinc-iron layers by a metallurgical reaction between the iron and zinc.

### Dealer Contact Information

Work phone: 810 346-2835  
 Email: [Benstrailersales@benssupercenter.com](mailto:Benstrailersales@benssupercenter.com)  
 Website: [www.Bensgreatlakesales.com](http://www.Bensgreatlakesales.com)  
 Location:

