


A series dump trailers - XDB



Trailer size	Trailer code	Deck length	Deck width	Deck height	GVWR	Payload capacity	Trailer weight
7' X 14'	GD7	14'	82"	27"	14,000 LBS	9,700 LBS	4,300 LBS

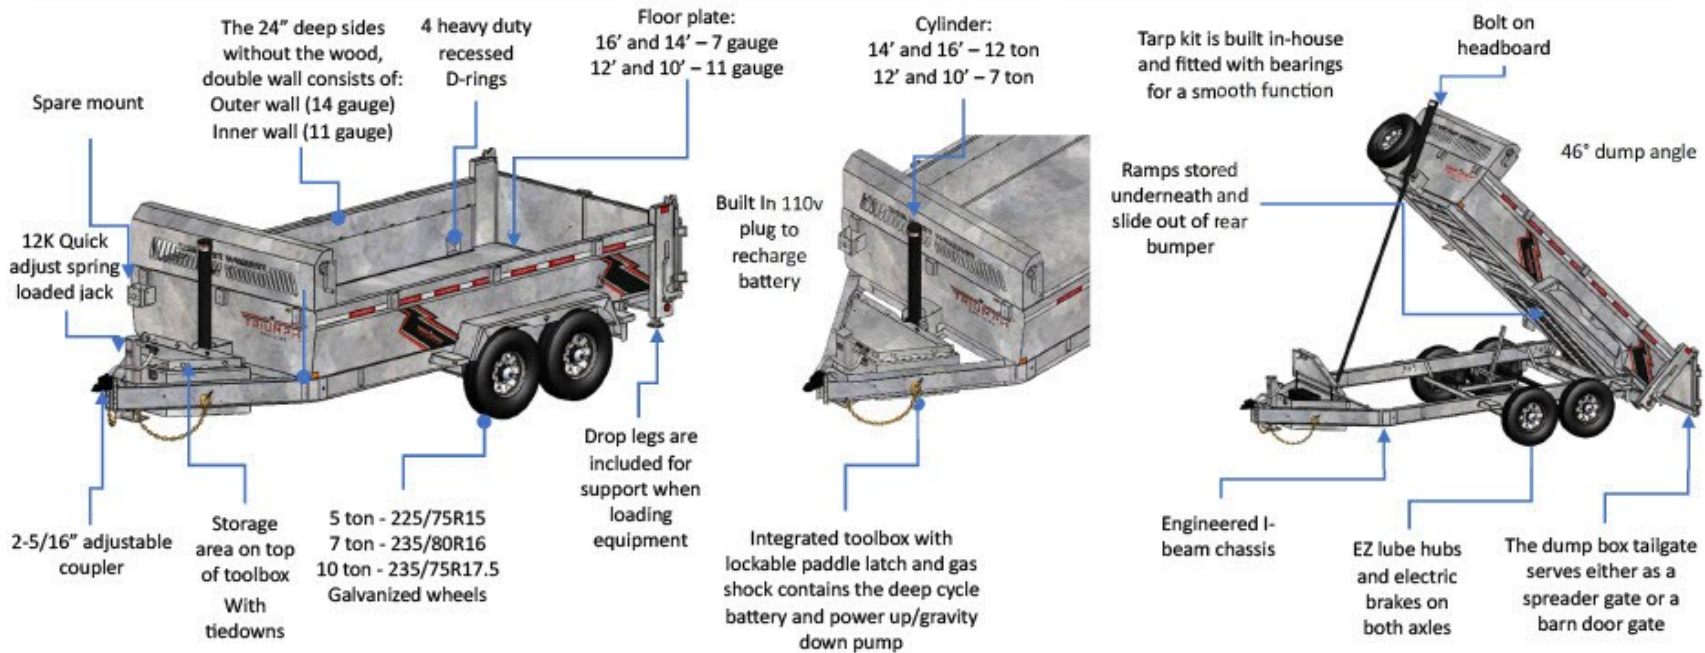

Additional options:

- Spare tire
- Ramps
- 3" eye adjustable pintle ring (25,000 LBS capacity)
- Hydraulic jacks
- 14 ply tire upgrade

Additional information:

- Hinge pins are zinc plated
- All hinges and pins are equipped with grease fittings
- LED lighting (lifetime warranty)
- Hot dip galvanizing offers greater protection and prevents the formation of rust
- Engineered I-beam frame designed specific to each size dump trailer

Hot Dip Galvanizing Process

First, the product is dipped in acidic solution and rinsed with cold water to remove the grease, dirt, rust and scale. It is then dipped in a flux solution to remove the last traces of oxide and to wet the steel. When the clean iron is then dipped into a molten zinc solution (typically at 450°C), it forms zinc-iron layers by a metallurgical reaction between the iron and zinc.

Dealer Contact Information

Work phone: 810 346-2835
 Email: Bentrailersales@benssupercenter.com
 Website: www.Bensgreatlakesales.com
 Location:

